Seaking SBP Parametric Sub-Bottom Profiler



If you need to obtain a clear picture of what lies below the seabed, look no further than the SeaKing parametric sub-bottom profiler from Tritech. Sub-bottom profiling is now possible from this compact, low power, unit. Ideal for ROV and AUV use.

Part of the SeaKing range of sensors the parametric sub-bottom profiler is easy to integrate into a sensor network using ARCNET or serial communication protocols. This allows all of the data from the suite of sensors to be displayed on one Surface Control Unit (SCU).

The display allows the operator to view the raw 200kHz seabed profile or choose to view the 20kHz sub-bottom layers produced by the parametric pulse or view both at the same time.

Innovative multi-element composite transducer array

The specially designed transducer enables the echosounder to emit very low frequencies whilst minimising the size of the overall unit. Producing a 20kHz pulse, the system is capable of penetrating the seabed and highlighting structural differences that are hidden from view to conventional echosounders.

Benefits

- Robust, proven, reliable design
- Easy integration with SeaKing sensors
- Penetrate sea-floor and silt

Features

- Dual frequency operation
- Compact design
- Energy efficient
- ARCNET, RS232 or RS485
- 4000m depth rating


Applications

- Site survey
- Route survey
- Pipeline crossing
- Wreck search
- Object detection



www.tritech.co.uk

Specification

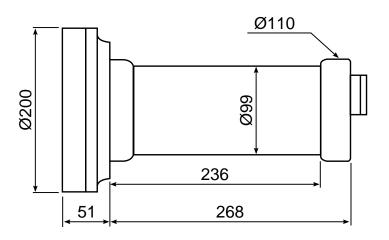

Not to scale, dimensions in mm.

Acoustic	Low frequency	High frequency	Physical	
Frequency	20kHz	200kHz	Weights	Air: 6.3kg, Water: 2.7kg
Beamwidth	4.5°	4°	Depth rating	4000m
Pulse length	100µs		Materials	Aluminium alloy (hard anodised)
			Temperature	-10 to 35°C (Storage: -20 to 50°C)

Electrical and Communications			
	20V to 72VDC at 8W AUX port voltage equal to Main port supply		
Communication protocols	ARCNET, RS232, RS485		

Software	
Tritech Seanet Pro or low-le	evel direct command control

S Se A O Altitude N/A High Frequency - 10M - 11M - 12M - 13M - 13M - 15M - 15M - 15M - 17M - 18M - 19M - 20M art 26/01/2009 11:52:43 AM Re nd 26/01/2009 12:26:16 PM **ə** 🛞 26/01/2009 11:59:49 AM UM 1M Low Frequency 17M 19M 20M



COM6: Err Rat N/A

Tritech International Ltd Peregrine Road, Westhill Business Park Westhill, Aberdeenshire, AB32 6JL United Kingdom sales@tritech.co.uk +44(0)1224 744 111 Document: 0374-SOM-00008, Issue: 04



Marketed by: